



Installing The Tailhouse Siding

The access door side of the tail house is one of the more complicated sides to cover so we will be giving a lot of detail here. Please take your time and follow step by step. Once you have covered this side of the tailhouse, installing the other sides will be easy. Start by installing Panel 3 making sure the over edge is over the tailhouse/winghouse corner panel. Closure stripping not shown in this picture but should already be installed.

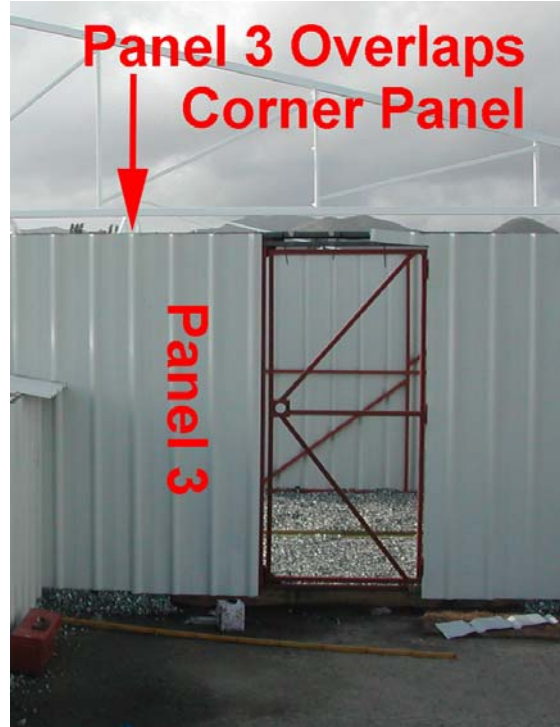


The siding around the access doorway will have to be cut. Screw panel 4 in place with the over edge facing the hangar front. Mark, remove and cut panel 4. Save the cut piece for the left side of the access doorframe.

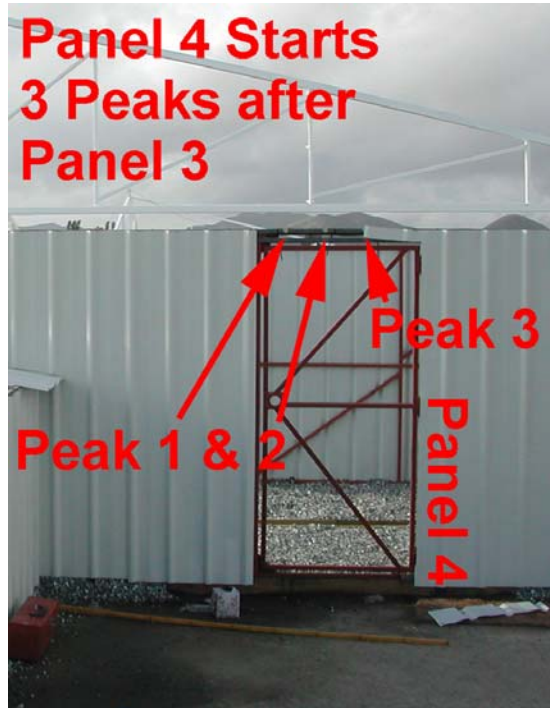


Cut hinge clearance before finally screwing panel 4 in place. Align the cut piece from panel 4 as shown. This piece will become panel 5.



Screw this piece in place and mark the cut line on the backside. Remove this piece and cut it on the cut line. The final cut piece is now panel 5. Reinstall this piece, panel 5, and screw it in place.

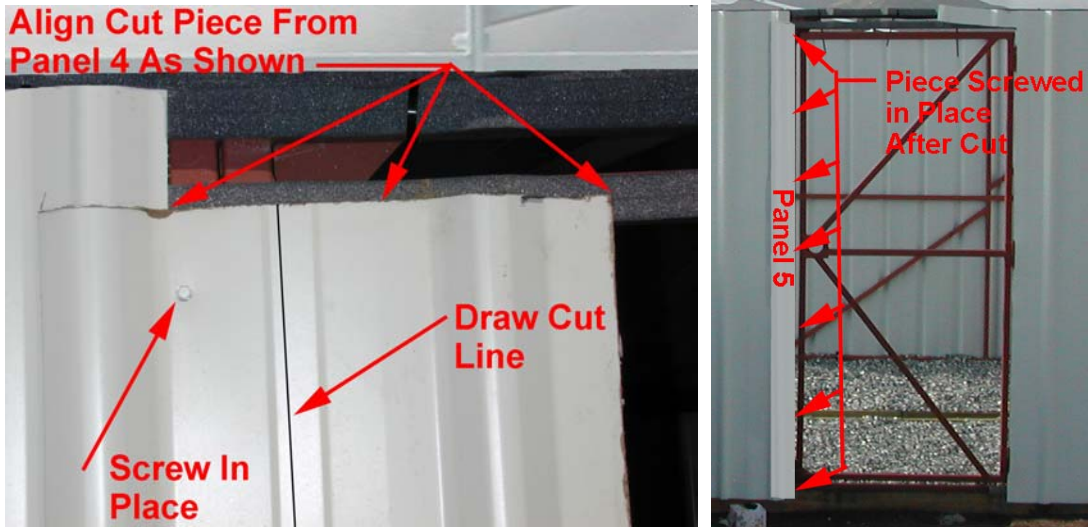

Make panel 6 from the scrap piece cut off the right wingtip panel. Install panel 6 making sure the left end is the over edge and right end is under panel 4. Screw panel 6 in place as shown.

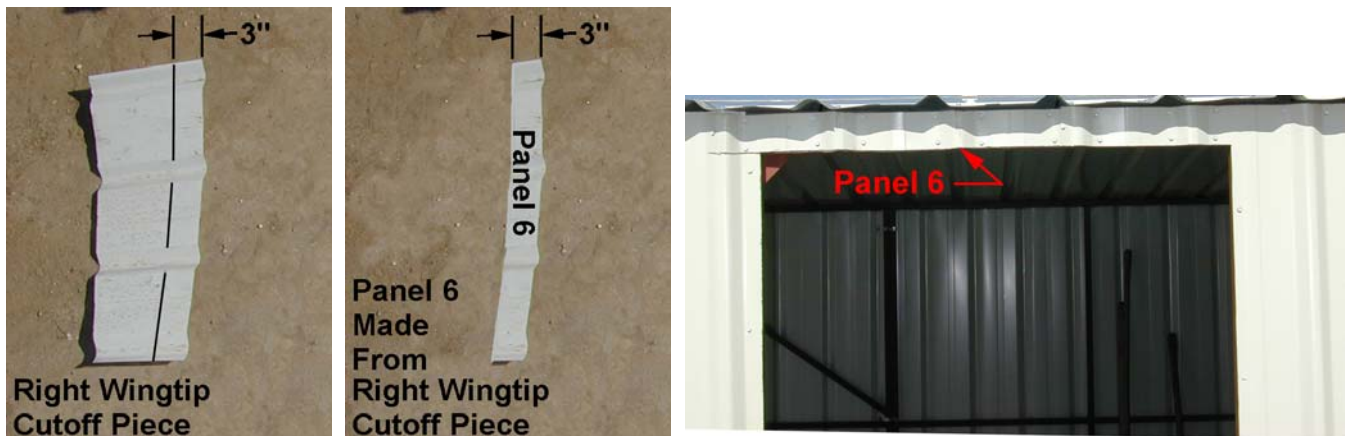

Install the sheeting on the door. The sheeting over hangs the doorframe by 1" on the latch side, 2" at the top and 3" at the bottom. It's flush on the hinge side. Install the doorknob per the instructions in the box. Mount the striker plate as shown. Install the open door latch as shown. The bottom male and female latch screws should screw into the doorframe and wallframe.



Installing the siding on the back wall of the tailhouse starting at the right hand corner. At the right hand corner start with the under side edge of the siding facing right. Screw this piece of siding in place. Mark the top and bottom frame rails at the center of the panel ridges so later you can properly install the closure-strips. Remove the panel and install the closure-strips. Install all of the siding on the back wall of the tailhouse.

Your hangar should now look like the following pictures but with the access door installed and without the crushed rock.

